



Government of India

Ministry of Railways

INDIAN RAILWAYS ORGANIZATION FOR ALTERNATE FUELS
4th FLOOR, RAILWAY OFFICES COMPLEX, TILAK BRIDGE, NEW DELHI-110002
Telephone no.:-011-23379107, Fax no.:-011-23379083

CALL FOR EXPRESSION OF INTEREST (EOI)

In order to develop Technical specifications for development of fuel cell/battery based hybrid power train along with associated control and suitably designed Energy Management Strategy (EMS) and storage module for retrofitment on 700 HP Narrow Gauge ZDM3 Diesel- Hydraulic Locomotives running on Kalka- Shimla section **EOI (IROAF/CME/BD/FUEL CELL POWERED LOCO) is invited.**

OCTOBER 2020

Indian Railways Organization for Alternate Fuels (IROAF), Government of India, Ministry of Railways, New Delhi invites Expression of Interest (EOI) for development of fuel cell/battery based hybrid power train along with associated control and suitably designed Energy Management Strategy (EMS) and storage module for retrofitment on 700 HP Narrow Gauge ZDM3 Diesel- Hydraulic Locomotives running on Kalka- Shimla section.

The **Functional Requirement Specifications** No. FRS/ED/2020/90 of October 2020 issued by Research Designs & Standards Organisation (RDSO) of the desired product and **Format for Letter of Response** have been uploaded on the website of IROAF <https://iroaf.indianrailways.gov.in/> →

IROAF Tenders → Expression of Interest. Alternatively EOI form can be collected in person from the office of IROAF, New Delhi. Interested Firms/Organizations who have experience and capability to meet with such requirements are requested to submit technical and other details in the prescribed Format attached herewith **on or before 31.12.2020** to the address mentioned below.

Firms willing to participate in EOI shall be required to make a presentation/VC on **03.12.2020** before sending their response.

Chief Mechanical Engineer/BD,
Indian Railways Organization for Alternate Fuels (IROAF),
Government of India, Ministry of Railways
4th Floor, Railway Office Complex, Tilak Bridge, New Delhi-110002
Telephone no.:-011-23379107, Fax no.:-011-23379083
Email: cmebdiroaf@gmail.com

FORMAT FOR LETTER OF RESPONSE

Respondents Ref No.:

Date:

Chief Administrative Officer,
Indian Railways Organization for Alternate Fuels (IROAF),
Government of India, Ministry of Railways
4th Floor, Railway Office Complex, Tilak Bridge, New Delhi-110002
Telephone no.:-011-23379001, Fax no.:-011-23379083

Dear Sir,

Subject: Response to - Expression Of Interest (EOI) to develop technical specifications for development of fuel cell/battery based hybrid power train along with associated control and suitably designed Energy Management Strategy (EMS) and storage module for retrofitment on 700 HP Narrow Gauge ZDM3 Diesel- Hydraulic Locomotives running on Kalka- Shimla section for drive cycle.

1. We, the undersigned, offer the following information in response to the Expression of Interest sought by you vide your Notification No._____, dated_____.
2. We are duly authorized to represent and act on behalf of _____(hereinafter the Respondent")
3. We have examined and have no reservations to the EOI Document including Addenda No(s)_____.
4. We are attaching with this letter, the copies of original documents defining: -
 - a) The Respondent's legal status;
 - b) Its principal place of business;
 - c) Its place of incorporation (if respondents are corporations); or its place of registration (if Respondents are cooperative institutions, partnerships or individually owned firms);
 - d) Self certified financial statements of Last three years, clearly indicating the financial turn over and net worth.
 - e) Copies of any market research, business studies, feasibility reports and the like sponsored by the respondent, relevant to the project under consideration
5. We shall assist IR/IROAF and/or its authorized representatives to obtain further clarification from us, if needed
 - a) IROAF and/or its authorized representatives may contact the following nodal persons for further information on any aspects of the Response:

S. No.	Contact Name	Address	Telephone	E Mail
1				
2				

6. This application is made in the full understanding that:
 - a) Information furnished in response to EOI shall be used confidentially by IROAF for the purpose of development of the project.
 - b) IROAF reserves the right to reject or accept any or all applications, cancel the EOI and subsequent bidding process without any obligation to inform the respondent about the grounds of same
 - c) We confirm that we are interested in participating in development of the project.

7. We certify that our turnover and net worth in the last three years is as under:

Financial Year	Turnover	Net worth

8. In response to the EOI we hereby submit the following additional details annexed to this application.

8.1 Details of customer(s) and supplies made in the field of item under EoI.

8.2 Experience and expertise for the items (Hydrogen Fuel Cell, battery backup and propulsion control) proposed in EOI. Details to be submitted in the format below:

S. No	Name and place of work	Authority/ agency for whom the work is being carried out	Date of award & agreement No. & Date	Date of completion (Original/ actual)	Agreemental cost of work /likely cost	Principal/Tech nical features work in brief	S.No. at which relevant certificate/ Documents are attached	Date of completion (Original/actual)
1	2	3	4	5	6	7	8	9

8.3 Technical appreciation/response to FRS (enclosed)

- Proposed layout
- Safety regulations

8.4 Details of man-power with their qualification and experience.

8.5 Details of Intellectual Property Rights (IPR) held, patent filed/held and MoU/agreement signed.

8.6 Details of ISO certification

8.7 undertaking as per Annexure-1:

9. The undersigned declare that the statements made and the information provided in the duly completed application are complete, true, and correct in every detail. We also understand that in the event of any information furnished by us being found later on to be incorrect or any material information having been suppressed, IROAF may delete our name from the list of qualified Respondents. We further understand that IROAF will give first preference to the applicants considered relevant for the purpose

Yours

sincerely,

(Sign)

NAME

In the Capacity of
Duly authorized to sign the
Response for and on behalf of

Date

(To be taken on non-judicial stamp paper of appropriate value as applicable in the respective state and dully notarised & witnessed)

UNDERTAKING

I, son of aged about Years resident of..... do hereby solemnly affirm as under:–

1. That the deponent is the Authorised signatory of *(Name of the Sole Proprietorship Concern/Partnership Firm/ Registered Company/ Joint Venture)*.

2. That the deponent declares on behalf of *(Name of the Sole Proprietorship Concern/ Partnership Firm/ Registered Company/Joint Venture)* that:

a) In regard to matters relating to the security and integrity of the country, no charge sheet has been filed by an agency of the Government / conviction by a Court of Law for an offence committed by the -----
-----*(name of the entity)* or by any sister concern of the ----- *(name of the entity)* would result in disqualification.

b) In regard to matters other than the security and integrity of the country,-----*(name of the entity)* has not been convicted by a Court of Law or indicted / passed any adverse order by a regulatory authority against it or it's any sister concern which relates to a grave offence, or would constitute disqualification. Grave offence is defined to be of such a nature that it outrages the moral sense of the community.

DEPONENT

VERIFICATION

I declare that the contents of para 1 to 2 above are true as per my knowledge and nothing has been hidden.

DEPONENT

Government Of India



Ministry of Railways

Functional Requirement Specifications

For

**Hydrogen Fuel cell based Narrow Gauge
Locomotive for Kalka- Shimla**

Specification No.

FRS/ED/2020/90

October 2020

**Research Directorate
Research Design & Standards Organization
Manak Nagar, Lucknow - 226011**

Contents

SN	Item	Page No
1	Background	4
2	Design requirements	4
3	Other functional requirements	6
4	Scope	7
5	Environmental conditions	8
6	Compliance to International/National standards	9
7	Hydrogen Storage	9
8	Mounting and isolation	10
9	Documentation	10
<i>Annexures</i>		
I	Maximum Moving Dimension	12
II	Technical details of locomotive	13
III	Driving cycle data	14

Abbreviations

- 'IR' means Indian Railways.
- 'RDSO' means Research Designs and Standards Organization, Ministry of Railways, Manak Nagar, Lucknow-226 011.
- 'NG' means 762 mm gauge, referred to as Narrow Gauge.
- 'IEC' means International Electro-technical Commission.
- 'IS' means Indian Standard.
- 'AAR' means Association of American Rail-roads.
- 'UIC' means Union International Des Chemis defer (International Union of Railways)
- 'IRS' means Indian Railway Standard.

Throughout this specification the words:

- Horse Power (HP) shall be taken as metric horse Power.
- Tonnes (T) shall be taken as metric tonne
- BOP- Balance of Plant
- EMS- Energy management Strategy
- SOC- State of charge
- DOD- Depth of Discharge
- PEMFC- Proton Exchange membrane Fuel cell
- MMD- Maximum Moving Dimension

1.0 Purpose

To develop fuel cell/battery based hybrid power train along with associated control and suitably designed Energy Management Strategy (EMS) and storage module for retrofitment on 700 HP Narrow Gauge ZDM3 Diesel- Hydraulic Locomotives running on Kalka- Shimla section for drive cycle enclosed as Annexure-III.

2.0 Background

The hydrogen fuel cell based rail propulsion technologies powered by PEMFC (proton exchange membrane based Fuel Cell) alongwith a suitably sized battery bank are being tried out globally for powering railroad vehicles. Elimination of fossil fuel and very low emissions are inherent advantages of such a rolling stock. Indian Railways plans to convert the existing 700 HP Narrow Gauge ZDM3 Diesel-Hydraulic Locomotive running on Kalka- Shimla section into hybrid fuel cell and battery based Locomotive.

For equipment layout of ZDM3 Diesel Hydraulic Locomotive running in narrow gauge Kalka-Shimla section, RDSO Drawing No.:SK.DP-3944 may be referred. Technical details of ZDM3 Loco plying in Kalka Shimla section are enclosed as Annexure-II for reference.

3.0 Design requirements

Hydrogen fuel cell based power stacks (Primary energy source PEMFC) alongwith the complete support and auxiliary systems like energy storage module (Secondary energy source i.e. Battery Bank), converter/Inverter, hydrogen storage module, Hydrogen Safety equipments, Fuel cell control system, propulsion control system, air handling unit, heat exchangers etc. (i.e. Balance of Plant) suitable for supplying power for the complete Driving Cycle and meeting the average and peak power demand for the complete driving cycle, including up and down trips, based on a suitably designed EMS (Energy Management Strategy). The complete system will have to be retrofitted on existing Narrow Gauge ZDM3 Diesel-Hydraulic Locomotive.

The total energy requirement for up and down trips, based on actual driving cycle, is 1556 kwh and 1170 kwh respectively. Power train, consisting of primary energy source as PEMFC and secondary energy source i.e battery bank, should be able to meet the peak power requirement as per the enclosed driving cycle. The power train should be so designed that it has minimal weight and space implications onboard of the loco and does not exceed the structural strength limits of the locomotive underframe, bogies and super structure. Optimization should include all accessories and balance of plant (BOP) in compliance with axle load limits and other structural strength requirements. The Energy management strategy (EMS) should be so designed that the State of Charge(SOC) of the battery largely remains same from start of cycle to end of cycle. The Depth of Discharge(DOD) of battery should be preferably limited to 30%. An indicative break-up of hybrid power train components to meet the above requirement is (a) 450 kw PEMFC (b) suitably rated battery bank to meet the peak requirement as per the enclosed driving cycle.

The Hydrogen Fuel Cell Retrofitment kit along with the Balance of Plant and Energy Storage/Hydrogen Storage modules will replace the existing power-train items onboard Narrow Gauge ZDM3 Diesel-Hydraulic Locomotives including drive components like Engine with foundation plate, Engine oil, air intake connection, exhaust connection, smoke box,

exhauster and compressor, fuel tank, fuel HSD, upper ballast in buffer end, ballast in radiator end, Lower ballast in buffer end and battery box (03 batteries) which weighs approximately to 9.4 tons.

The Retro fitment scheme targets retention/ replacement /addition of following components/ sub-assemblies:

- a) Existing hydraulic Transmission system shall be retained. Drive to the transmission will be coupled to a 3 phase VVVF controlled AC motor of suitable power rating and speed to supply the requisite torque levels at the desired RPMs.
- b) A motor driven expessor/compressor/exhauster will be used for braking requirements.
- c) The fuel cell control system will be interfaced with the locomotive control console in such a way that the drivers HMI/MMI/Control desk interfaces remains unchanged.
- d) Suitable heat exchanger/radiator should be designed to cool the hydraulic/transmission oil of the hydraulic transmission of the locomotive.

Conformance to following Boundary Conditions while designing retro-fitment kit (retro-fitment scheme) has to be ensured:

- a. Existing ZDM3 Diesel-Hydraulic Locomotive Bogies shall not be altered/changed.
- b. Locomotive underframe to bogie interface shall not be altered/changed.
- c. As per the locomotive GA/architecture, the space available on platform for retrofitment will be around 6.99(L) x 2.24(W) x 2.085(H) m. In addition, the space released by fuel tank under the platform can also be utilized for mounting of equipments subject to condition that the axle load limits and the MMD stipulations are not exceeded.
- d. Axle Load of ZDM3 Diesel-Hydraulic Locomotive with the retrofitted equipments shall not exceed 9.25 Tons.
- e. The layout shall be designed so as to not disturb the existing Centre of Gravity of ZDM3 Diesel-Hydraulic Locomotive.
- f. Mounting of equipment/sub-assemblies shall not create infringement with IRSOD for Narrow gauge latest amendment.
- g. Peak Power rating of the Fuel cell based ZDM3 Diesel-Hydraulic Locomotive shall be 700 HP/522 KW. The typical driving cycle of 700 HP ZDM3 Diesel-Hydraulic Locomotive presently operating in Kalka- Shimla Section of Northern Railway is enclosed as Annexure-III.
- h. The Energy Management Strategy (EMS) shall be so designed that with the power-train rating mentioned under para 3 above and the train operation requirements as per the typical driving cycle enclosed as Annexure-III, the State of Charge (SOC) of the battery bank at the start of the driving cycle and the end of the driving cycle remains the same.
- i. Suitable Hydrogen fuel storage system will be a part of the retro-fitment kit. Hydrogen storage module shall be such that it will cater to one trip of Up and Down direction operation of approximately 220 Kms in total. Hydrogen shall be preferably stored on top. Requirement of Hydrogen fuel storage on-board shall be calculated based on driving cycle/duty cycle and the total distance to be traveled.

- j. The proposed Retro-fitment kit and Retro-fitment scheme shall have to comply with the existing legal and safety regulations and undergo certifications applicable in India for application in service.
- k. Air brake/Vacuum brake system shall continue without any modification. Minor modification in layout of piping, if needed, will be done with prior written permission of IR/RDSO.
- l. Inbuilt redundancy in the design of fuel cell based propulsion architecture shall be such that in case of failure of one or more fuel cell stack, propulsion with limited capacity stays operational during train service.

4.0 Other functional requirements

- i. Technical design features of all the major equipment such as fuel cell stacks, hydrogen storage system, battery, converter etc. and controls shall be governed by the relevant IEC/International/IR/RDSO standards.
- ii. The fuel cell design and associated equipments forming the part of BOP and having interface with Hydrogen storage modules and heat exchangers shall be based on a working design / design under trial or under pilot implementation anywhere in the world on a Metro Rolling Stock, Trams, Rail Cars, Locomotives, Sub-urban transport systems etc. IR shall evaluate the various designs based upon cost of operation, commercial availability, maintainability, life cycle costing, dimensions/ footprint of the proposed equipment, use in similar applications etc. The efficiency of the system shall not be less than the internationally accepted industry standards and the emissions shall be minimal.
- iv. Direct hydrogen based fuel cell stack(s) shall be used.
- v. The fuel cell stack details provided as under are indicative and only for guidance.

PEMFC - Proton Exchange Membrane (PEM) Fuel Cells.

- i. Very low maintenance cost.
- ii. There shall be no emissions or discharge of any harmful substances such as lead etc.
- iii. It shall produce clean DC power with a low thermal and acoustic signature. Existing hydraulic Transmission system shall be retained. Drive to the transmission will be coupled to a 3 phase VVVF controlled asynchronous motor of suitable power rating and speed to supply the requisite torque levels at the desired RPMs
- iv. The system shall be compact with modular construction.
- v. It shall incorporate state of the art technology including its own humidification and hydrogen recirculation systems.
- vi. The cooling system shall provide constant airflow to fuel cell system to preclude confinement of accidentally leaked hydrogen.
- vii. All service points shall be located on the perimeter of the fuel cell power plant to allow

full service without module removal.

- viii. The layout shall preferably allow symmetric piping of air and coolant to all fuel cell stack modules, and shall result in closely balanced flow for the air and coolant systems. The layout shall be suitably designed keeping in view the safety of the passengers on-board.
- ix. The hydrogen storage units shall be of adequate pressure rating and shall comply with the relevant international standards related to vehicle functional safety, hydrogen safety and protection of persons against electric shocks mentioned under para 7.0.
- x. The design of Fuel cell based Narrow Gauge ZDM3 Diesel- Hydraulic Locomotive should facilitate re-filling/unit replacement of empty Hydrogen tanks with filled Hydrogen tanks within 45 minutes using manual efforts. The design should have provision for refilling of the empty Hydrogen cylinder in in-situ conditions on- board using a suitably designed Hydrogen refilling system within a reasonable time not exceeding 45 minutes. The replacement of empty cylinders will continue till the time the hydrogen storage & refilling facility is set-up by Indian Railways at the nominated yards. Till the time way-side Hydrogen storage/filling facility is developed by IR, the design should facilitate manual replacement in in-situ condition in yards/platforms/depots of the empty Hydrogen cartridge/cylinders with filled cylinders carrying Hydrogen at 350 bar.
- xi. Remote diagnostics (optional feature): Narrow Gauge ZDM3 Diesel- Hydraulic Locomotive shall be equipped with remote diagnostics wherein critical ZDM3 Diesel- Hydraulic Locomotive health monitoring of systems like Battery system, fuel cell stacks, hydrogen storage, DC voltage bus, cooling system, braking and other vital parameters of the Diesel- Hydraulic Locomotive controls should be available for identifying defective or failed components of the hybrid power train.

xii. Operating requirements:

Sharpest curve to be negotiated	Ruling gradient of the section is 1 in 33 and sharp curves of 48 ⁰
700 HP Narrow Gauge ZDM3 Diesel- Hydraulic Locomotive weight Nominal Axle Load	Not exceeding 37 t Not exceeding 9.25 t
Maximum Operating Speed. Maximum permitted speed	35 kmph 25 kmph

Scope of work

The scope will cover Design, supply, retrofit, testing & validation, prove out, field trials, of fuel cell & battery based power stack modules, hydrogen storage, power electronics/controls & associated equipments including necessary engineering & supervision work for retrofit of Narrow Gauge ZDM3 Diesel- Hydraulic Locomotive. The interfacing of the Fuel Cell Stack Controller with HMI/MMI/Driver interface shall be a part of the Scope of work.

- A. An indicative list of the equipment covered in scope of supply is as under :
 - a. Hydrogen storage tank(s)/Cylinder(s)
 - b. Piping and control, safety, sensing devices for hydrogen storage
 - c. Cables

- d. Hydrogen Fuel cell stack modules
- e. Air delivery, and Cooling Systems
- f. Battery Module
- g. Gauges & Fittings
- h. Control console / HMI / MMI
- i. Auxiliary power systems
- j. Microprocessor based control system with instrumentation, actuators, motor controllers, and a programmable automation controller (PAC) including AC drive motor control, Converters/Inverters etc.
- k. Remote diagnostic system
- l. Any other accessory/sub system/sub assembly required for satisfactory functioning of system
- m. Motor driven expressor and heat exchanger/radiator for cooling of hydraulic transmission oil

However, the list above is not exhaustive. Any other component / Assembly / Software/ Hardware etc., that is required for proper functioning of the retrofitted equipments, will have to be supplied as a part of scope of work.

Environmental conditions

Design factors such as weight, center of gravity, packaging and safety requirements etc. among other features shall have to be considered. Complete system after retrofitment shall have to be done considering the harsh operating conditions, especially shock loads during marshalling in yard/depots, this shall essentially require component mounting systems capable of absorbing high energy. Additionally, system design shall address Indian Railway regulations governing safety and such events as derailment, side impact from yard traffic, refueling and maintenance.

Fuel cell based Narrow Gauge ZDM3 Diesel- Hydraulic Locomotive shall be required to work continuously under following atmospheric conditions:

Maximum temperature (Atmospheric)	(i) 55 °C (under sun). (ii) 47 °C (in shade)
Humidity	90 % (Up to 100% during rainy season.)
Altitude	Max. 2100 meter above mean sea level
Reference site conditions	Ambient temp. -10°C to 55 °C (Max)
Dust	May have to operate in extremely dusty environment.

All the equipment and their mounting arrangement shall satisfactorily withstand the vibrations and shocks as indicated below:

- The maximum allowable acceleration in longitudinal, lateral, and vertical directions for the fuel-cell hardware shall be 3g (*'g' being acceleration due to gravity*). This 3g maximum limit applies at or below the system natural frequency.

International / National standards

1. The fuel cell stack should conform to the relevant clauses of the standards listed below:

ISO 23273-1:2006 Fuel Cell road vehicles specification – Part-1: Vehicle functional safety

- 6.1.1 Fail safe design
- 6.1.2 First failure response
- 6.3 Connections (Electrical & Mechanical)

ISO 23273-2:2006 Fuel Cell road vehicles specification – Part-2: Protection against hydrogen hazards for vehicles fuelled with compressed hydrogen

- 5.2.1 General component requirements
- 5.2.3 Overpressure protection
- 5.2.4 Hydrogen shutoff system
- 5.4 Discharges

ISO 23273-3:2006 Fuel Cell road vehicles specification – Part-3: Protection of persons against electric shock

- 6.1 Electrical equipment marking
- 6.2 Identification of voltage class B wiring
- 8.2.3 Insulation resistance measurement of voltage class B electric power sources
- 8.2.5 Voltage withstand capability
- 8.3.2 Protection degrees for barriers/enclosures
- 8.3.3 Continuity requirements for potential equalization.

- System Shall be designed to withstand vibrations as per IEC-60571

8.0 Hydrogen storage

Hydrogen fuel storage shall use readily available hardware and should comply to all safety regulations / certifications related with hydrogen safety measures. Modules shall be mounted as per approved layout, each consisting of adequate no. of carbon fiber/aluminum tanks.

Each tank shall incorporate an excess flow valve, thermally activated pressure relief devices (PRD), temperature sensor, electronically controlled solenoid valve, and manual shut-off valves. In the event of a line rupture between the tank and distribution manifold, the tank excess-flow valve shall close. In the event of excessive heat (above 109 °C), such as could be caused by a battery fire, the thermally activated PRD's shall vent the tank contents through a routed vent line pointing upward and away from the vehicle. The temperature sensors shall be utilized by the control system to regulate refueling speed as well as indicate any over temperature warnings. The electronic solenoid valve shall be normally closed, powered open for run and refueling modes, and closed if a high level system fault is detected.

The module manifolds, each with independent pressure sensors, shall be connected to a primary distribution line that includes an excess-flow valve to control any ruptures in the primary distribution line. The primary distribution line shall connect to the refueling line, and shall then continue to a filter, pressure regulator, additional electronic solenoid valve, pressure sensor, and an additional PRD. The additional solenoid valve shall add a layer of shutdown capability, while the pressure sensor verifies regulator functionality.

An emergency shutoff device shall be located on each side of the ZDM3 Diesel- Hydraulic Locomotive to allow non-operators or refueling personnel to shut down the fuel system.

9.0 Battery System

The Lithium Ion batteries shall be used. However, alternate design of batteries may also be

accepted based upon performance standpoint (i.e. better Energy and Power density, Life Cycle etc.).

10.0 Driving Cycle

The Driving Cycle of ZDM3 Diesel- Hydraulic Locomotive presently operating in Kalka to Shimla section of Northern railway is enclosed as Annexure-III.

11.0 Fuel Cell based Power-Train Control System & its Integration with HMI/MMI/Driver Interface/Drivers' control desk

The existing HMI *(Driver Interface) shall remain unchanged. However, the PEMFC and Battery parameters shall be incorporated for display on the MMI/HMI display in the existing control console. The information to be displayed to the driver/assistant on the driver desk / control dashboard shall be decided mutually between IR and the Fuel Cell System designer.

12.0 Mounting and Isolation

Mounting of all fuel cell system modules to the ZDM3 Diesel- Hydraulic Locomotive is of critical importance because Diesel- Hydraulic Locomotive are marshaled in rail yards, which can lead to shock loads up to 10 Gs (11 ms saw tooth). Although they are of short duration, shocks of this magnitude could lead to immediate or fatigued failure of components or mounting structures. To mitigate this harsh environment, each module shall be isolated from the impact loads; this may be effectively done through the use of springs, specifically rubber or synthetic mounts or isolators.

The mounts' natural frequency should be well below the possible disturbing frequencies of the system. The isolation system shall also provide proper shock protection in the horizontal, lateral, and vertical directions. The mounting system shall be designed so that it is at the vertical center of gravity, which shall minimize any rocking motion of the power plant and transmit force directly into the mounts. In addition to careful selection of isolation mounts, finite element analysis shall be used to validate all structural weldment designs.

Documentation

Following documents shall be submitted to IR for evaluation:


- Functional description of the complete system, including salient features and advantages of the offered system
- All performance curves, including the proposed notch-wise TE Vs Speed, fuel efficiency, efficiency and ventilation characteristics of the major equipment offered, parasitic load of the auxiliaries used in the system, basic design data like ratings, power circuit diagram and temperature capability, envelope and mounting drawings etc. shall be submitted with the offer.
 - a) Technical documentation explaining the complete system including characteristic curves and efficiency, diagnostics and protection circuits etc.
 - b) ZDM3 Diesel- Hydraulic Locomotive control circuit line diagram.
 - c) Lay out and mounting drawings of all the equipment offered
 - d) Layout and mounting drawings of each sub-system with interface details.
 - e) Cooling system details.
 - f) Procedure for user settable parameter alteration, fault data downloading and analysis

etc.

- g) Recommended list of spares for 3 years with price.
- h) List of special tools, jigs and fixtures needed for testing, commissioning, maintenance and repair.
- i) Maintenance, troubleshooting and operating manuals with detailed information for all the equipment offered in soft and hard copies. Renewal parts manual in soft and hard copies.

Irrespective of the details brought out here, all information and documentation which are essential for operation and maintenance of the ZDM3 Diesel- Hydraulic Locomotive with the equipment supplied shall be submitted on request of Indian Railways.

INDIAN RAILWAYS RDSO (MP) | MAXIMUM MOVING DIMENSIONS FOR 762mm NG DIESEL HYDRAULIC LOCO (FOR KALKA-SHIMLA SECTION ONLY)

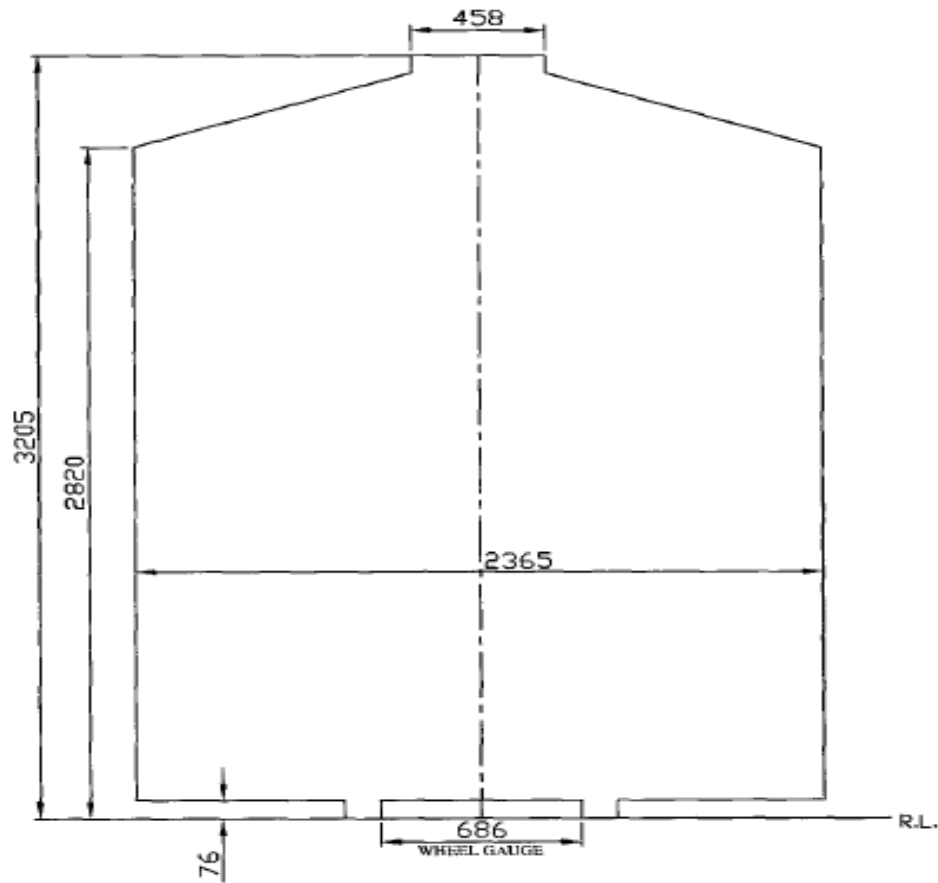

D	<i>ant</i>
C	<i>Shankar</i>
APPRO.	<i>ant</i>
D:	2.9.09

ALL DIMENSIONS ARE IN mm.

ALT.	NO. OF PLACES	REP. RD.	DESCRIPTION	ALT. NO.	NO.	SKEN.	DATE

SCALE: 1:20	REF:
	DRG. NO. SK.DP-3914
FIRST ISSUED	SUPERSEDES
	SUPERSED BY

Technical details of ZDM3 locos (for KLK-Shimla)

S.No.	Particulars	ZDM ₃ (mfd by Parel)
1.	Gauge (mm)	762
2.	Sharpest curve	48°
3.	Max. gradient	1 in 33
4.	Wheel Arrgt.	B'-B'
5.	Wheel dia (mm)	700
6.	Wheel base (mm)	1590
7.	Loco length (mm)	10300
8.	Loco width (mm)	2240
9.	Loco height (mm)	3180
10.	Wt. of loco (t)	37
11.	Adhesive weight (t)	37
12.	Axle load (t)	9.25
13.	Max. T.E (t)	11.1 t
14.	Max. Brake power (ref drg. No.12.08.14)	30400 kg
15.	Max. Braking force	9.12 t (for whole loco) 9.12/4=2.28t per axle
16.	C.G from R.L.	Max. 740mm
17.	Fuel Capacity	1400 liters
18.	Max. Operating Speed(kmph)	35 km/h
19.	Max. permitted speed in KLK-SML	25 km/h
20.	Continuous speed km/h	8
21.	TE (t)	10.5 (Limited by adhe.) 10.6 (Special device)
22.	Sharpest curve negotiable	35 m Radius (50°)
23.	Engine	CIL make VTA-1710L
24.	Rated power of engine	(700hp) = 527 kW
25.	Idle speed(rpm)	600
26.	Rated speed of engine	2100
27.	Transmission	Voith L4r2U2
28.	Axle Drive:	KPC Make
29.	G. Ratio Primary: Secondary:	4.58:1 - 25 km/h 3.09:1
30.	Brake system	Vacuum & air brake
31.	Compressor	TRC 1000 B
32.	Exhauster	
33.	Cab	Dual cab at end of loco

*Driving Cycle of ZDM3 Diesel- Hydraulic Locomotive in KALKA - SHIMLA section of Northern Railway

Note - The master controller provided in the locomotive is stepless type. For mapping the driving cycle, the continuous stepless range has been converted into 8 discrete power set points covering the complete range.

Drive cycle for Kalka to Shimla Section :

Time(min)	Notch	Power(HP)
0	1	87.5
2	6	525
4	7	612.5
6	7	612.5
8	7	612.5
10	7	612.5
12	6	525
14	6	525
16	4	350
18	8	700
20	7	612.5
22	7	612.5
24	7	612.5
26	6	525
28	7	612.5
30	8	700
32	8	700
34	8	700
36	7	612.5
38	7	612.5
40	7	612.5
42	7	612.5
44	7	612.5
46	5	437.5
48	7	612.5
50	7	612.5
52	7	612.5
54	7	612.5
56	6	525
58	7	612.5

Time(min)	Notch	Power(HP)
60	7	612.5
62	7	612.5
64	7	612.5
66	7	612.5
68	4	350
70	7	612.5
72	7	612.5
74	7	612.5
76	1	87.5
78	7	612.5
80	7	612.5
82	7	612.5
84	7	612.5
86	6	525
88	6	525
90	7	612.5
92	1	87.5
94	0	0
96	0	0
98	0	0
100	3	262.5
102	7	612.5
104	7	612.5
106	6	525
108	6	525
110	6	525
112	5	437.5
114	6	525
116	0	0
118	3	262.5
120	1	87.5
122	1	87.5
124	4	350
126	3	262.5
128	0	0
130	0	0

132	0	0
134	0	0
136	0	0
138	1	87.5
140	5	437. 5
142	4	350
144	4	350
146	6	525
148	0	0
150	3	262. 5
152	4	350

Time(min)	Notch	Power(HP)
154	4	350
156	4	350
158	1	87.5
160	1	87.5
162	6	525
164	6	525
166	5	437.5
168	0	0
170	5	437.5
172	2	175
174	5	437.5
176	4	350
178	1	87.5
180	1	87.5
182	1	87.5
184	1	87.5
186	0	0
188	0	0
190	0	0
192	1	87.5
194	5	437.5
196	6	525
198	6	525
200	6	525
202	6	525
204	6	525
206	7	612.5
208	5	437.5
210	1	87.5
212	6	525
214	6	525
216	5	437.5
218	6	525
220	5	437.5
222	5	437.5
224	5	437.5
226	7	612.5
228	7	612.5
230	6	525

232	6	525
234	5	437. 5
236	6	525
238	6	525
240	6	525
242	7	612. 5
244	6	525
246	1	87.5

Time(min)	Notch	Power(HP)
248	0	0
250	3	262.5
252	6	525
254	6	525
256	6	525
258	3	262.5
260	4	350
262	4	350
264	1	87.5
266	3	262.5
268	1	87.5
270	0	0
272	5	437.5
274	6	525
276	5	437.5
278	6	525
280	7	612.5
282	6	525
284	0	0
286	0	0
288	0	0
290	0	0
292	4	350
294	5	437.5
296	5	437.5
298	6	525
300	7	612.5
302	6	525
304	0	0
306	5	437.5
308	5	437.5
310	6	525
312	5	437.5
314	6	525
316	1	87.5
318	0	0

Driving cycle for SHIMLA TO KALKA trip:

Time(Min)	Notch	Power(HP)
0	1	87.5
2	1	87.5
4	5	437. 5
6	5	437. 5
8	6	525

Time(Min)	Notch	Power(HP)
10	0	0
12	6	525
14	4	350
16	5	437. 5
18	6	525
20	0	0
22	1	87.5
24	1	87.5
26	5	437. 5
28	6	525
30	4	350
32	5	437. 5
34	5	437. 5
36	0	0
38	5	437. 5
40	6	525
42	6	525
44	6	525
46	6	525
48	6	525
50	5	437. 5
52	4	350
54	5	437. 5
56	5	437. 5
58	0	0
60	1	87.5
62	5	437. 5
64	5	437. 5
66	1	87.5
68	5	437. 5
70	4	350
72	1	87.5
74	5	437. 5
76	0	0
78	5	437. 5
80	5	437. 5
82	6	525
84	5	437. 5

86	5	437. 5
88	5	437. 5
90	5	437. 5
92	4	350
94	1	87.5
96	5	437. 5
98	1	87.5
100	0	0
102	5	437. 5


Time(Min)	Notch	Power(HP)
104	5	437. 5
106	5	437. 5
108	5	437. 5
110	4	350
112	5	437. 5
114	1	87.5
116	1	87.5
118	0	0
120	0	0
122	5	437. 5
124	6	525
126	7	612. 5
128	7	612. 5
130	7	612. 5
132	6	525
134	6	525
136	5	437. 5
138	5	437. 5
140	1	87.5
142	0	0
144	5	437. 5
146	5	437. 5
148	5	437. 5
150	5	437. 5
152	5	437. 5
154	5	437. 5
156	5	437. 5
158	5	437. 5
160	0	0
162	4	350
164	6	525
166	6	525
168	6	525
170	6	525
172	7	612. 5
174	0	0

176	0	0
178	0	0
180	5	437. 5
182	6	525
184	7	612. 5
186	6	525
188	7	612. 5
190	5	437. 5
192	0	0
194	5	437. 5
196	5	437. 5

Time(Min)	Notch	Power(HP)
198	5	437. 5
200	6	525
202	4	350
204	1	87.5
206	1	87.5
208	1	87.5
210	0	0
212	5	437. 5
214	5	437. 5
216	5	437. 5
218	5	437. 5
220	5	437. 5
222	6	525
224	1	87.5
226	1	87.5
228	1	87.5
230	5	437. 5
232	1	87.5
234	1	87.5
236	6	525
238	1	87.5
240	5	437. 5
242	1	87.5
244	6	525
246	1	87.5
248	1	87.5
250	6	525
252	5	437. 5
254	1	87.5
256	1	87.5
258	6	525
260	4	350
262	1	87.5
264	1	87.5
266	1	87.5
268	1	87.5
270	1	87.5
272	1	87.5
274	1	87.5
276	1	87.5
278	1	87.5
280	5	437.

		5
282	1	87.5
284	1	87.5
286	1	87.5
288	1	87.5
290	1	87.5

Time(Min)	Notch	Power(HP)
292	1	87.5
294	5	437. 5
296	1	87.5
298	4	350
300	1	87.5
302	1	87.5
304	1	87.5
306	1	87.5
308	0	0

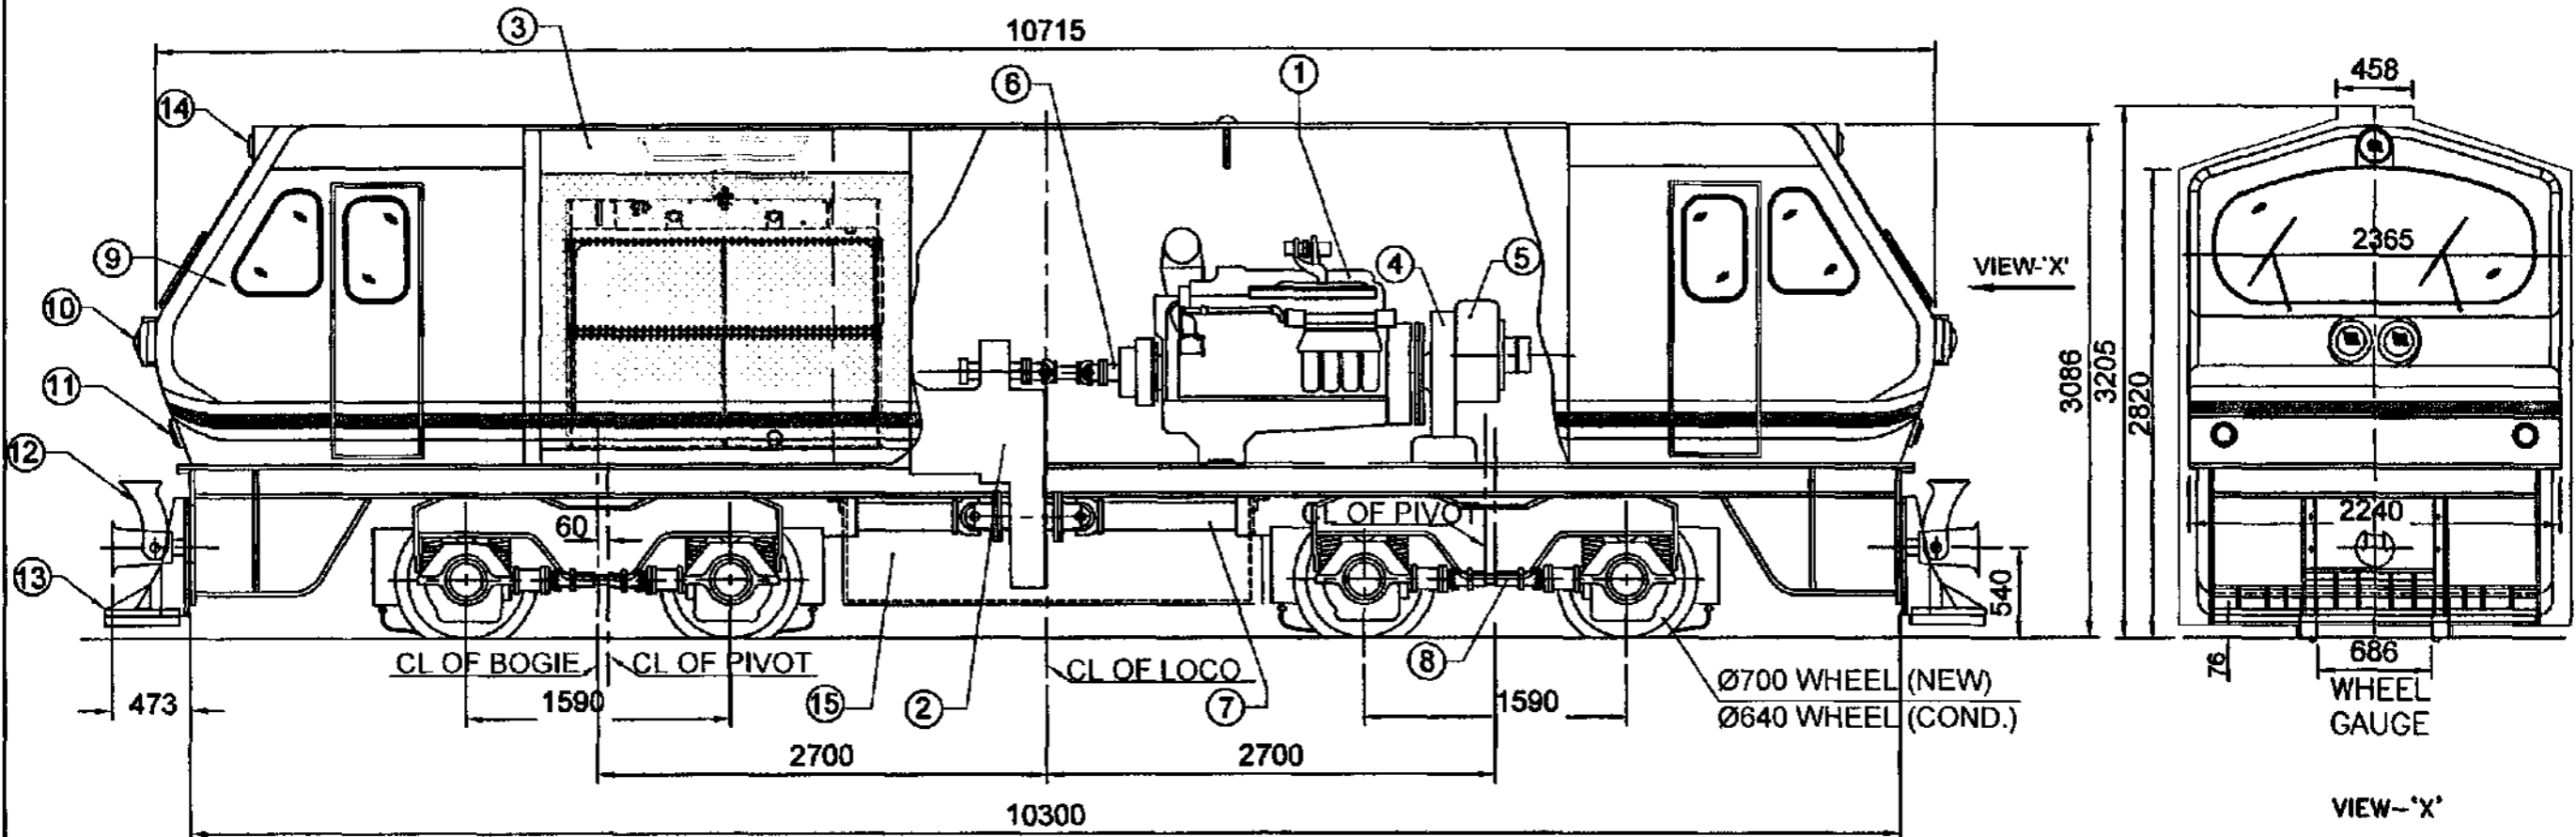

- 1. DIESEL ENGINE VTA 1710 L
- 2. HYDRAULIC TRANSMISSION
- 3. RADIATOR COMPARTMENT
- 4. COMPRESSOR
- 5. EXHAUSTER
- 6. CARDAN SHAFT
- 7. CARDAN SHAFT
- 8. CARDAN SHAFT
- 9. DRIVER'S CAB
- 10. HEAD LIGHT
- 11. MARKER LIGHT
- 12. ABC COUPLER
- 13. CATTLE GUARD
- 14. FLASHER LIGHT
- 15. FUEL TANK

0	316V	50
C	316V	25
APPD.	316V	8.3
	316V	0.8
	316V	0.1
BYMBOL	Re um (MAX)	TOLERANCES ON UNTOLERANCED DIMENSIONS TO IS: 2102 ()

(ALL DIMENSIONS ARE IN mm.)

SNo.	IR PART No.	DESCRIPTION	NO. / Wt(Kg) LOCO EACH	MATL.	SPEC.
APPLICABLE FOR		EQUIPMENT LAYOUT OF DIESEL HYDRAULIC LOCOMOTIVE FOR NG KALKA-SHIMLA SECTION (762mm GAUGE)			
KSR SECTION					
SCALE: 1:25		REF:	FIRST ISSUED		
INDIAN RLYS. R.D.S.O. (MP)		DRG. No. SK. DP - 3944	SUPER SEDES SUPER SEDED BY		

ALT.	NO. OF PLACES	REF. NO.	DESCRIPTION	ALT. NOTE NO.	SIGN.	DATE